

RPC250 PRODUCT SPECIFICATION


Technical Detail

CAPACITY		BLOWER WHEEL		FILTER PADS	
Discharge Type:	D,S, T	Dia x Width mm	390 x380	Size D&T mm	770 x 590 (4)
Variable Speed Range L/s	1900/850	Shaft mm	22 sq SS	Size Side mm	770 x 725 (3)
High/Low Speeds L/s	1900/1270	Pulley mm	205 x A	Area D&T / S m ²	1.8 / 1.7
		Speed RPM	610 : 370	Velocity m/s	1.05 / 1.13
SHIPPING		Outlet - Down mm	555 x 555	Material	Chilcel / Aspen
Height mm	D&T:860	Outlet - Side/Top mm	390 x 505		
Height mm	Side:1000	PUMP		MOTOR	
Length mm	910	Rating Watt	40	Type:	PSC
Width mm	910			Speed RPM	1400
Volume m3	0.7/0.9	RESERVOIR		Rating kW	0.56
Mass kg	52	Capacity Litres	33	Current AMP	Var,3.6;2SP,3.6/2.4
Net Unit kg	46	Drain Size : Thread	48 : 40	Supply	240V 50 Hz
Operating kg	79			Pulley	89-100 x 15.75 x A

Sound Power Level (SWL)

RPC250 Radiated	81	75	76	73	70	63	78
	125	250	500	1k	2k	4k	dBA
OCTAVE BAND CENTRE FREQUENCY (Hz)							

Fan Curve

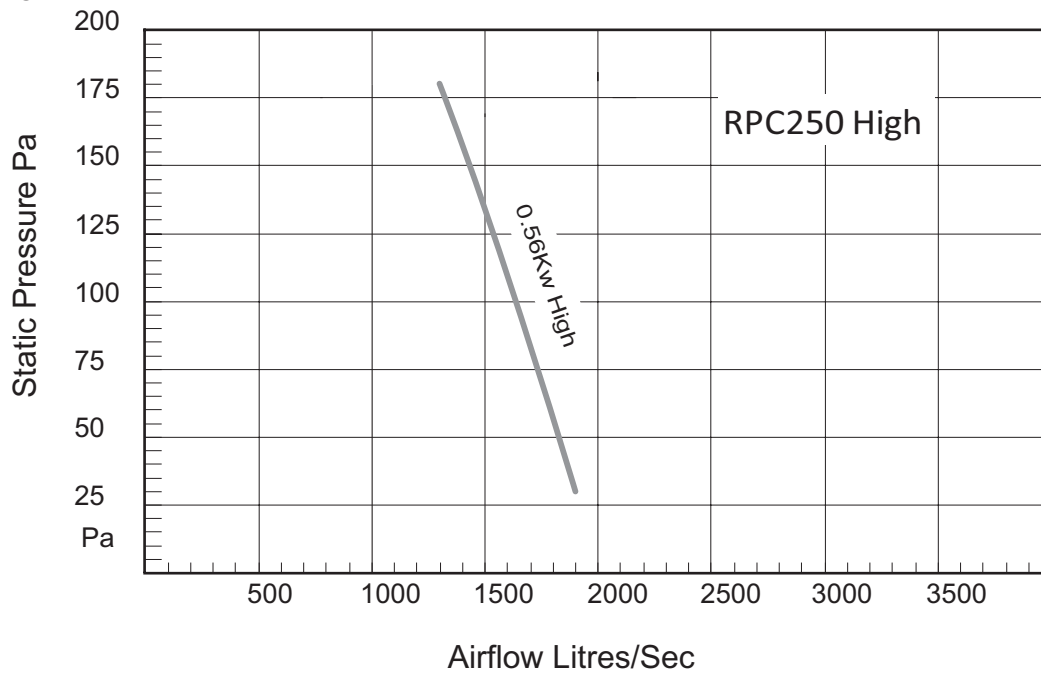

Note: Fan curve shown is at constant rated current - free discharge.

It is the policy of Seeley International to introduce continual product improvement. Accordingly, specifications are subject to change without notice. Please consult with your dealer to confirm the specifications of the model selected.

RPC320 PRODUCT SPECIFICATION


Technical Detail

CAPACITY		BLOWER WHEEL		FILTER PADS	
Discharge Type:	D,S, T	Dia x Width mm	470 x380	Size D&T mm	1015 x 590 (4)
Variable Speed Range L/s	2600/1150	Shaft mm	22 sq SS	Size Side mm	1015 x 725 (3)
High/Low Speeds L/s	2600/1730	Pulley mm	205 x A	Area D&T / S m ²	2.4 / 2.2
		Speed RPM	630 : 380	Velocity m/s	1.08 / 1.18
SHIPPING		Outlet - Down mm	555 x 555	Material	Chilcel / Aspen
Height mm	D&T:860	Outlet - Side/Top mm	390 x 505		
Height mm	Side:1000			MOTOR	
Length mm	1150			Type:	PSC
Width mm	1150	PUMP		Speed RPM	1350
Volume m3	1.1/1.3	Rating Watt	40	Rating kW	0.75
Mass kg	66	RESERVOIR		Current AMP	Var,5.4;2SP,5.4/3.4
Net Unit kg	60	Capacity Litres	48	Supply	240V 50 Hz
Operating kg	108	Drain Size : Thread	48 : 40	Pulley	89-100 x 15.75 x A

Sound Power Level (SWL)

RPC320 Radiated	78	77	76	73	70	61	78
	125	250	500	1k	2k	4k	dBA
OCTAVE BAND CENTRE FREQUENCY (Hz)							

Fan Curve

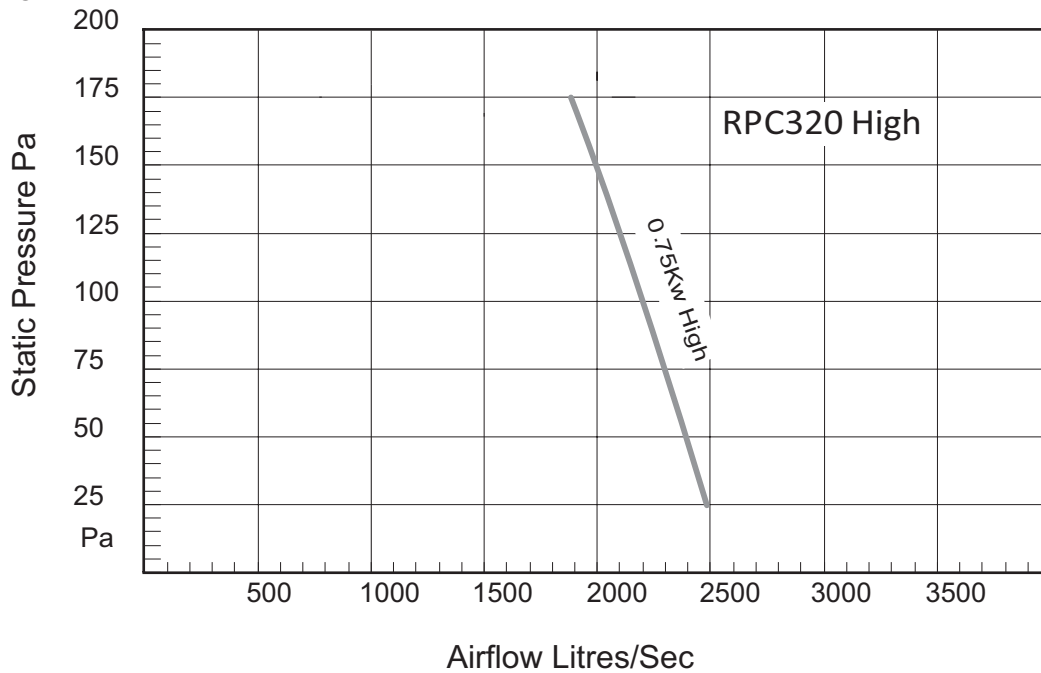

Note: Fan curve shown is at constant rated current - free discharge.

It is the policy of Seeley International to introduce continual product improvement. Accordingly, specifications are subject to change without notice. Please consult with your dealer to confirm the specifications of the model selected.

RPC400 PRODUCT SPECIFICATION


Technical Detail

CAPACITY		BLOWER WHEEL		FILTER PADS	
Discharge Type:	D,S, T	Dia x Width mm	470 x380	Size D&T mm	1015 x 725 (4)
Variable Speed Range L/s	3050/1310	Shaft mm	22 sq SS	Size Side mm	1015 x 860 (3)
High/Low Speeds L/s	3050/2035	Pulley mm	205 x A	Area D&T / S m ²	2.94 / 2.61
		Speed RPM	650 : 390	Velocity m/s	1.03 / 1.16
		Outlet - Down mm	555 x 555	Material	Chilcel / Aspen
		Outlet - Side/Top mm	390 x 505		
SHIPPING		PUMP		MOTOR	
Height mm	D&T:990	Rating Watt	40	Type:	PSC
Height mm	Side:1120			Speed RPM	1450
Length mm	1150	RESERVOIR		Rating kW	1.1
Width mm	1150	Capacity Litres	48	Current AMP	Var,6.8;2SP7.1/5.3
Volume m3 DT/S	1.3/1.5	Drain Size : Thread	48 : 40	Supply	240V 50 Hz
Mass kg	70			Pulley	89-100 x 15.75 x A
Net Unit kg	64				
Operating kg	118				

Sound Power Level (SWL)

RPC400 Radiated	81	79	81	79	76	67	83
	125	250	500	1k	2k	4k	dBA
OCTAVE BAND CENTRE FREQUENCY (Hz)							

Fan Curve

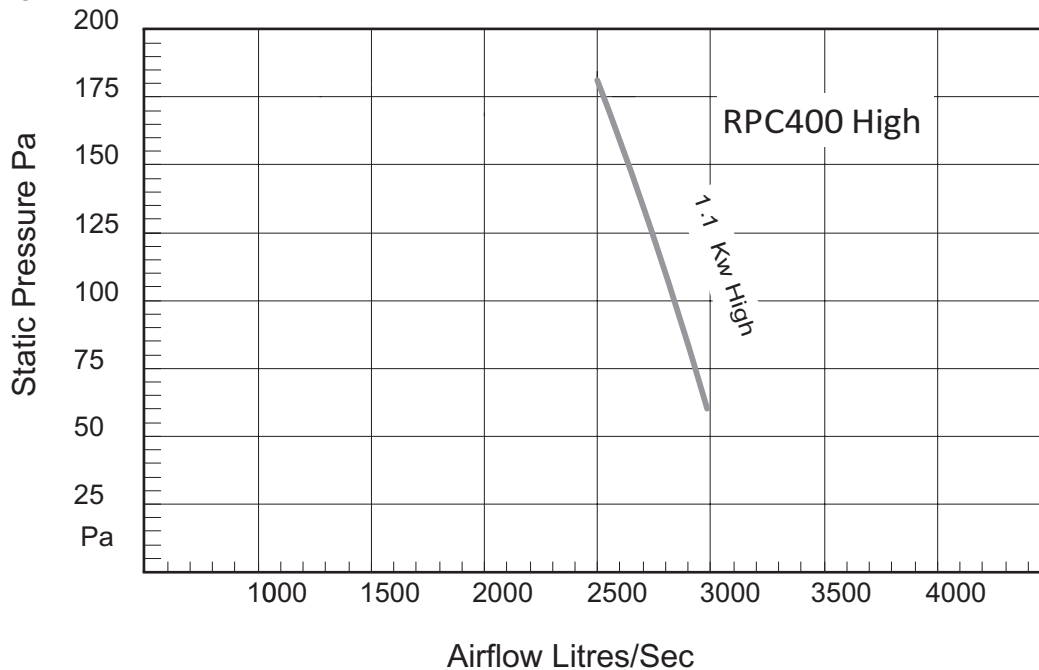

Note: Fan curve shown is at constant rated current - free discharge.


It is the policy of Seeley International to introduce continual product improvement. Accordingly, specifications are subject to change without notice. Please consult with your dealer to confirm the specifications of the model selected.

RPC450 PRODUCT SPECIFICATION

Technical Detail

CAPACITY		BLOWER WHEEL		FILTER PADS	
Discharge Type:	D only	Dia x Width mm	470 x 380	Size D only mm	1015 x 860 (4)
Variable Speed Range L/s	3400/1450	Shaft mm	22 sq SS	Size S&T mm	n/a
High/Low Speeds L/s	3400/2265	Pulley mm	205 x A	Area D m ²	3.50
		Speed RPM	685 : 400	Velocity m/s	1.0
		Outlet mm	390 x 505	Material	Chilcel / Aspen
SHIPPING		PUMP		MOTOR	
Height mm	1120	Rating Watt	50	Type:	PSC
Height mm	S&T n/a			Speed RPM	1450
Length mm	1150			Rating kW	1.5
Width mm	1150	RESERVIOR		Current AMP	7.2
Volume m3	1.48	Capacity Litres	48	Supply	240V 50 Hz
Mass kg	74	Drain Size : Thread	48 : 40	Pulley	89-100 x 15.75 x A
Net Unit kg	68				
Operating kg	122				

Fan Curves

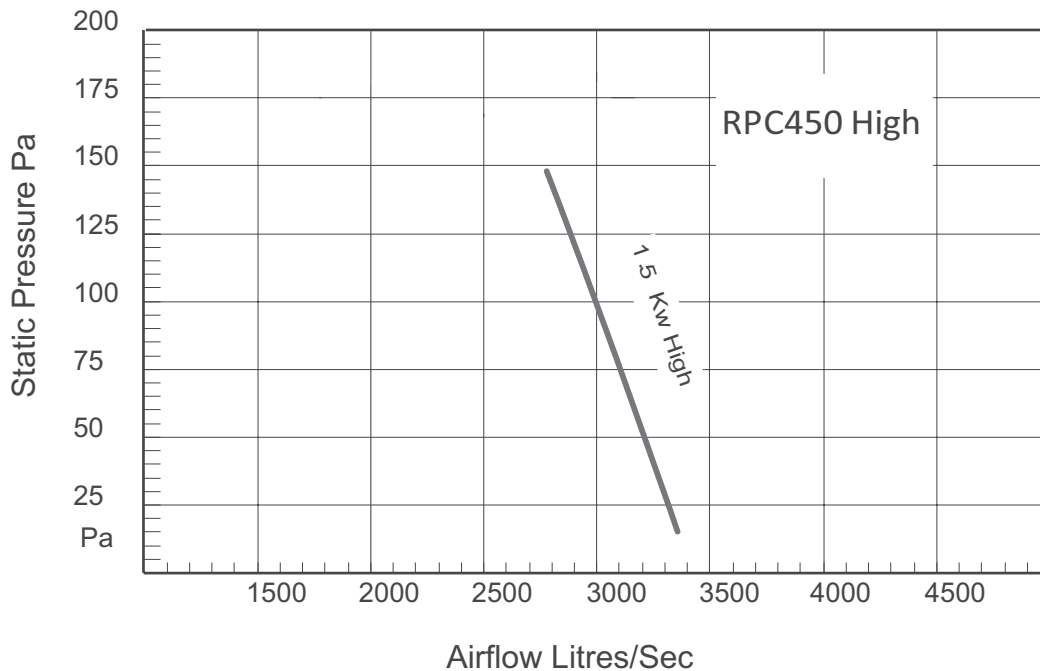

Note: Fan curve shown is at constant rated current - free discharge.

It is the policy of Seeley International to introduce continual product improvement. Accordingly, specifications are subject to change without notice. Please consult with your dealer to confirm the specifications of the model selected.